


## 8' x 20' Main Dock

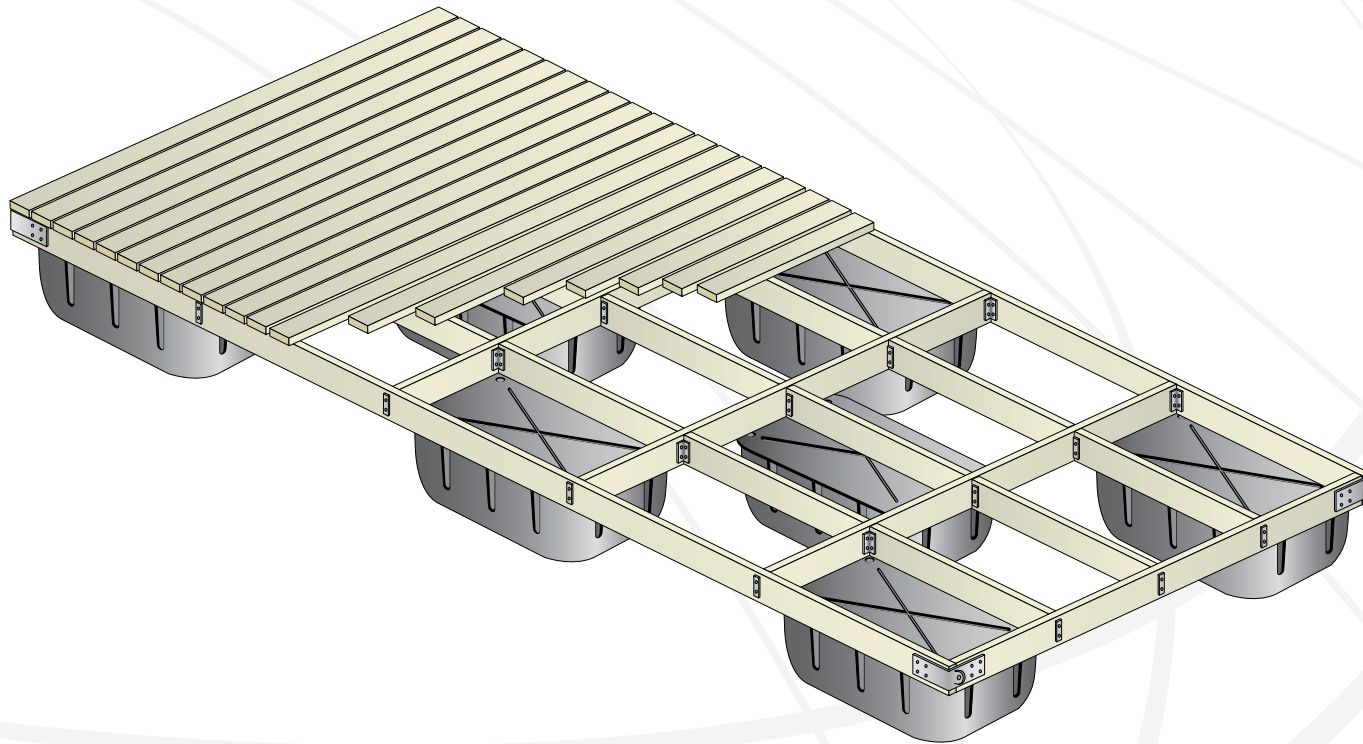

### Bill of Materials:

| Standard | Commercial | # | Part Description                 | Qty.         |
|----------|------------|---|----------------------------------|--------------|
| 26522    | 25491*     | 1 | Outside Corner Male              | 2            |
| 26524    | 26417*     | 2 | Inside Corner                    | 4            |
| 26523    | 26402*     | 3 | Outside Corner End               | 2            |
| 26527    | 26406*     | 4 | Angle Bracket                    | 34           |
| 24284    | 26409*     | 5 | Washer Plate                     | 52           |
| 26530    |            | 6 | 3/8" x 2-1/2" Carriage Bolt Set  | 160          |
|          | or 26533   | 6 | 1/2" x 3" Carriage Bolt Set      | 160          |
| 24288    | 24290      | 7 | 3/8" x 2" Lag Bolt & Flat Washer | 48           |
| •        | •          | 8 | 20 Penny Screw Nails             | About 7 lbs. |
| •        | •          | 9 | 2' x 4' x 16" Float Drum         | 8            |

• Obtained from Local Hardware Store Or Marine Supply  
 \* Most commonly used. Other parts or options available, see product descriptions, pages 3-6

### Lumber Materials:

|               |                              |    |
|---------------|------------------------------|----|
| 2" x 8" x 20' | Side Stringers (237-1/2")    | 2  |
| 2" x 8" x 10' | End & Cross Stringers (93")  | 6  |
| 2" x 8" x 4'  | Short Cross Stringers (46"*) | 15 |
| 2" x 6" x 10' | Deck Boards (98-1/2")        | 40 |

\* Should be individually measured.

### Design Notes:

Tie Down assumes no responsibility or liability for the completeness or accuracy of these drawings. Drawings are provided as a guideline only. Dimensions are approximate. Variances do concur in lumber and component parts, so please check all measurements on dock hardware, float drums and lumber prior to drilling holes. Verify all dimensions length, width and thickness of lumber.

